



# ROYAL ENTRANCE WITH DECK

## Contents of the Accessories box #3-E5029


SCREW KIT 140-0007

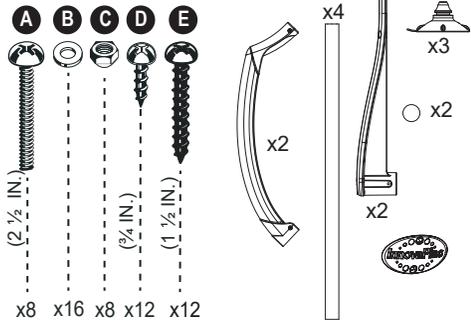

## Step shell with safety fence

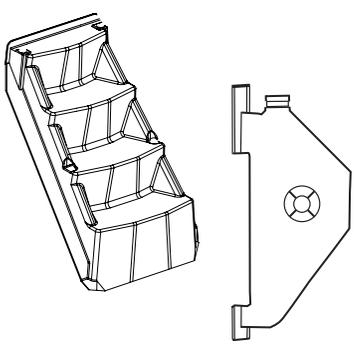

## Required tools (not included)

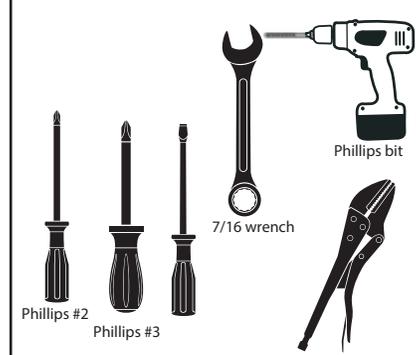

## Sand (not included)




## ! WARNING


- ▶ Install the step on a flat surface.
- ▶ Do not jump or dive from the step.
- ▶ Remove the step from water when temperatures drop below freezing.
- ▶ In winter, the step should be stored in an area protected from snow.
- ▶ Never lift the step by its handrails.
- ▶ Use BATTERY operated tools to avoid electric shock near water.
- ▶ Ensure no corrosive materials are added to the step or hardware kit.
- ▶ The step must be installed per manufacturer's instructions.
- ▶ File off all stripped or sharp edges before assembly to avoid injuries and liner damage.
- ▶ The manufacturer is not responsible for damages or injuries caused by improper installation or use of product.
- ▶ To ease the installation of handrails and bolts, use a screwdriver to line up the holes.

# A


1) Insert the three Step Cups™ in the holes under the step.\*

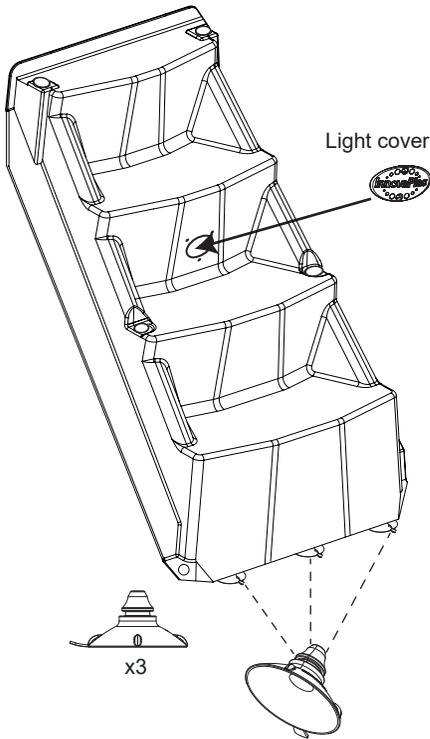

**A1)** Insert half of the Step Cup mushroom ring in the hole, at a 45 degree angle.

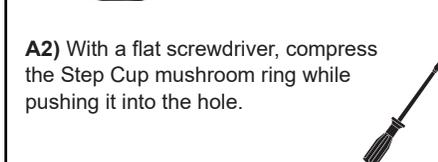

**A2)** With a flat screwdriver, compress the Step Cup mushroom ring while pushing it into the hole.



**A3)** Twist the Step Cup to ensure that the mushroom ring has entirely cleared the wall thickness. If it has, the suction cup should rotate freely.

2) Align the light cover's two alignment rods into the small holes at the top of the larger hole. Insert the light cover by pressing firmly.

## CAUTION

Failing to install the Step Cup™ system will greatly reduce the steadiness of the step and will void the manufacturer warranty.



\* View step cups installation tips on YouTube: <https://www.youtube.com/watch?v=W5RH1VNxpu0>


## MANUFACTURER WARRANTY

1 year on pool step.  
1 year on hardware.

# ROYAL ENTRANCE WITH DECK



## B

- 1) Insert the four posts into the step and secure them in place with the bolts, washers, and nuts provided.
- 2) Insert the deck supports over the two rear posts. Do not secure.
- 3) Insert the handrails onto the posts and secure them with the screws provided.

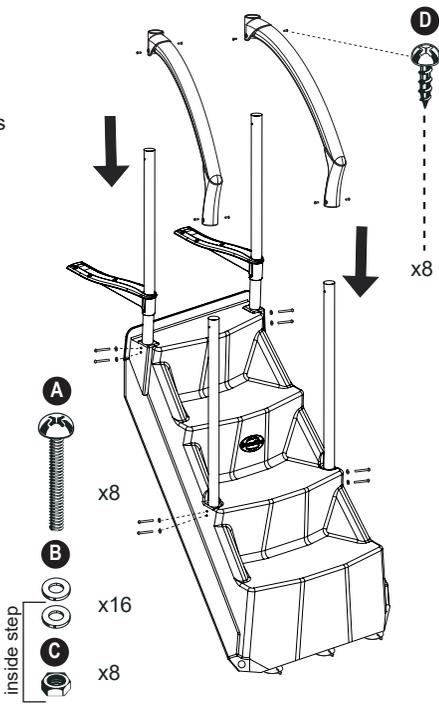


## C

- 1) Fill the safety fence with sand until it is 3/4 full. The approximate weight should be 50 lbs.
- 2) Install the cap properly with the screw provided with the safety fence.

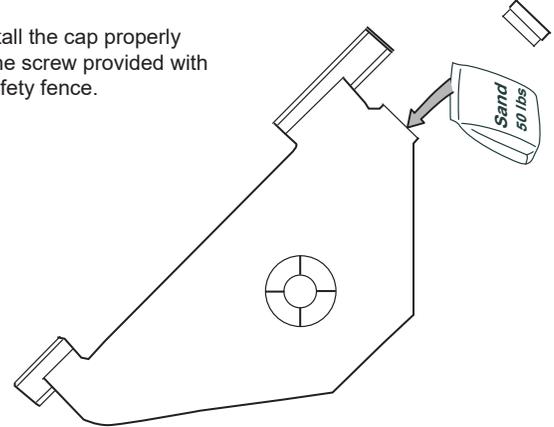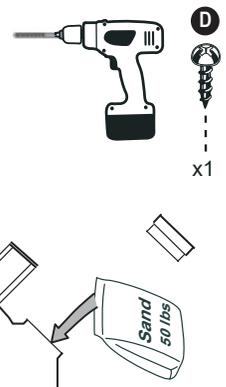

## D

- 1) Slide the fence into the step, as shown, by first pushing up (A) and then pushing down (B).

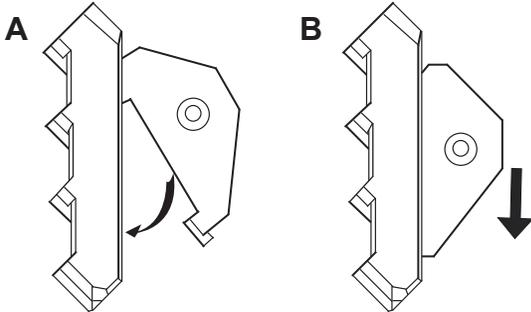


### CAUTION

The safety fence should never touch either the bottom or the pool wall.

## E

- 1) Slowly submerge the step into the pool. Make sure you do not damage the pool liner in the process.
- 2) Slide the deck supports to the height of the deck.




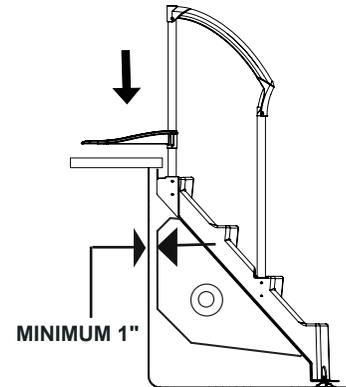


### CAUTION

To prevent pool liner puncture, keep a minimum 1" gap between the pool liner and the rear underside of the step.

## F

- 1) Affix the deck supports to the deck with the screws supplied.
- 2) Install the post covers on the handrails.
- 3) Pull the deck supports (already fixed to the deck) upwards to create a spring effect on the step.
- 4) Fasten the supports to the rear posts while pushing the entire step downwards.

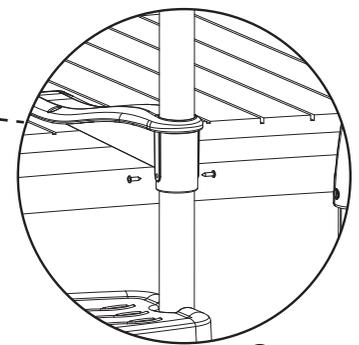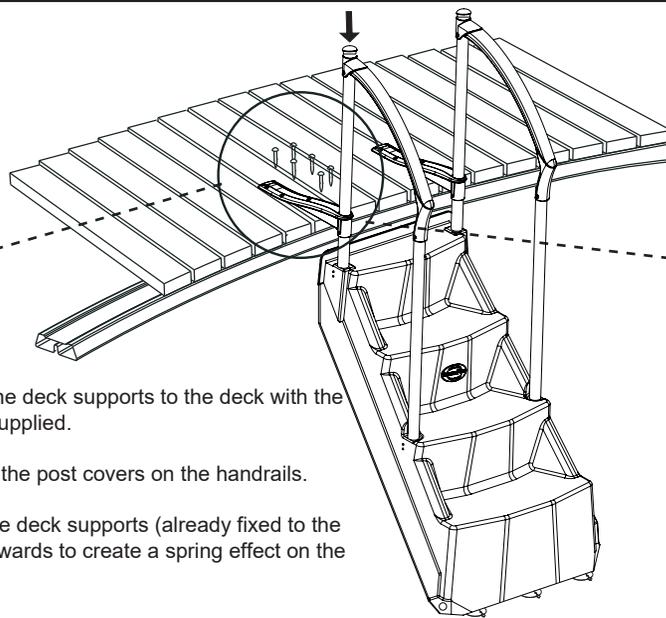

### MANUFACTURER WARRANTY

1 year on pool step.  
1 year on hardware.