




MAJESTIC 8005 WITH DECK

Contents of accessory box

SCREW KIT 140-0027



Majestic step Shell



Sand

(not included)




⚠ WARNING

- ▶ Install the step on a flat surface.
- ▶ Do not jump or dive from the step.
- ▶ Remove the step from water when temperatures drop below freezing.
- ▶ In winter, the step should be stored in an area protected from snow.
- ▶ Never lift the step by its handrails.
- ▶ Use BATTERY operated tools to avoid electric shock near water.
- ▶ Ensure no corrosive materials are added to the step or hardware kit.
- ▶ The step must be installed per manufacturer's instructions.
- ▶ File off all stripped or sharp edges before assembly to avoid injuries and liner damage.
- ▶ The manufacturer is not responsible for damages or injuries caused by improper installation or use of product.
- ▶ To ease the installation of handrails and bolts, use a screwdriver to line up the holes.

Required tools

(not included)

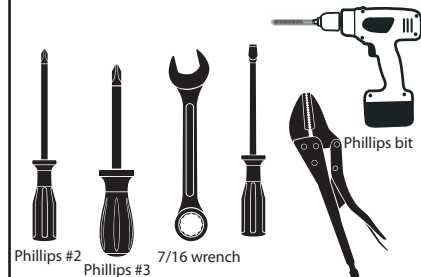

A

- 1) Assemble the two handrail halves.
- 2) Insert the handrail into the recesses.
- 3) Fasten the handrail to the step using the screws, washers and nuts provided.

B

Insert the six Step Cups™ in the holes under the step.*

* View step cups installation tips on YouTube:
<https://www.youtube.com/watch?v=W5RH1VNxpu0>

B1) Insert half of the Step Cup mushroom ring in the hole, at a 45 degree angle.

B2) With a flat screwdriver, compress the Step Cup mushroom ring while pushing it into the hole.

B3) Twist the Step Cup to ensure that the mushroom ring has entirely cleared the wall thickness. If it has, the suction cup should rotate freely.

CAUTION

Failing to install the Step Cup™ system will greatly reduce the steadiness of the step and will void the manufacturer warranty.

MANUFACTURER WARRANTY

**1 year on pool step.
1 year on hardware.**



2257 route 139
Drummondville, Québec
J2A 2G2

WWW.INNOVAPLAS.COM

REV. 03/05/2020


PN:

PG:1

MAJESTIC 8005 WITH DECK

C

1) Fill the ballast with sand. The approximate weight should be 15 lbs.




2) Screw the lid in place and align the cover ribs with the holes in the ballast base.



Align holes

3) Fasten the cover to the ballast base with the four screws provided.




x4

4) Slowly submerge the step into the pool. Make sure you do not damage the pool liner in the process.

5) Angle the whole step so that it is entirely under water. Purge all the air from under the steps.

6) Slide the deck support to the height of the deck.

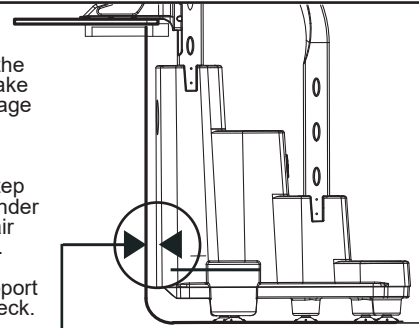

MINIMUM 1" All Step Cups™ must be installed.


CAUTION

To prevent pool liner puncture, keep a minimum 1" gap between the pool liner and the rear underside of the step.

D


1) Affix the deck support to the handrail's vertical post using the 4 screws provided.

2) Align the step carefully and fasten the deck support to the deck, as shown below.

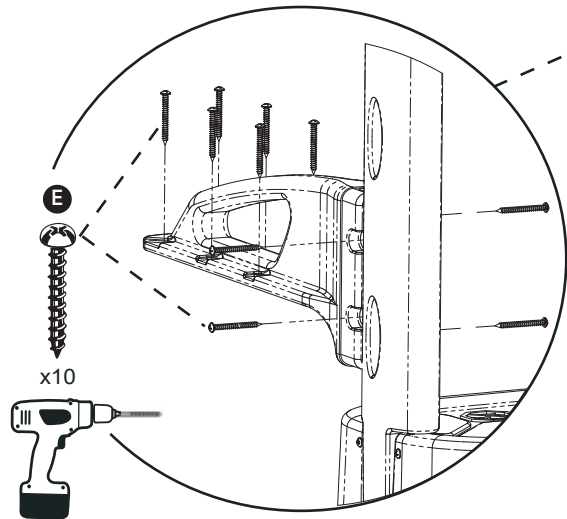

x10

3) Drop the ballast in the step hole.

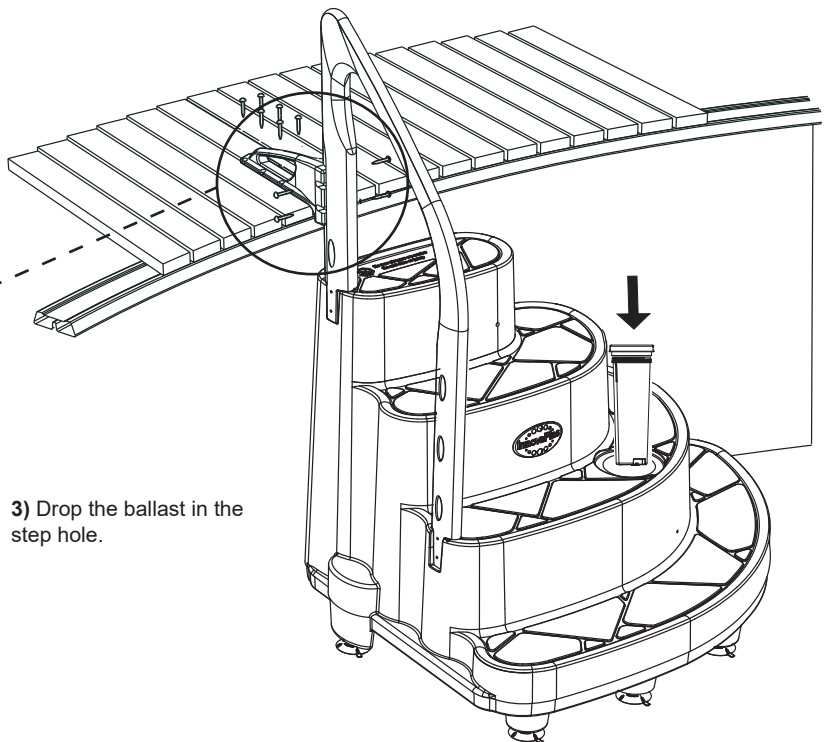

POOL DECK ABOVE POOL TOP SEAT





POOL TOP SEAT FLUSH WITH DECK POOL

HOW TO MOUNT YOUR DECK SUPPORT FOR YOUR POOL

?

POOL DECK OFFSET FROM TOP SEAT

POOL DECK OFFSET FROM TOP SEAT

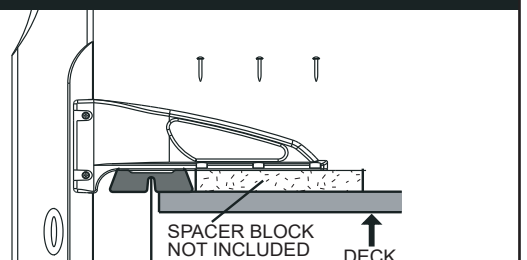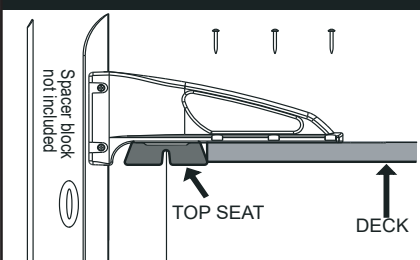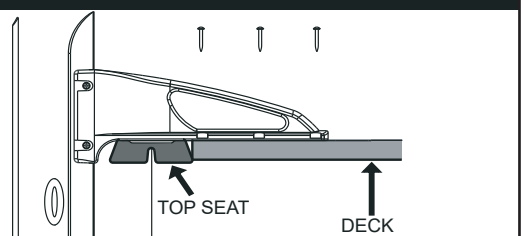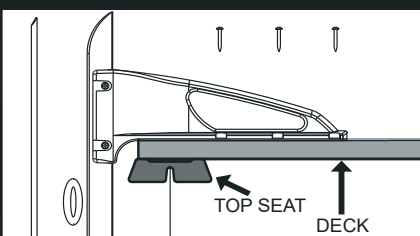

2257 route 139
Drummondville, Québec
J2A 2G2

WWW.INNOVAPLAS.COM

MANUFACTURER WARRANTY

1 year on pool step.
1 year on hardware.

REV. 03/05/2020

PN:

PG:1