



H2O 7000 WITH CLASSIC LADDER 6003

Contents of ladder box SKU # 7000

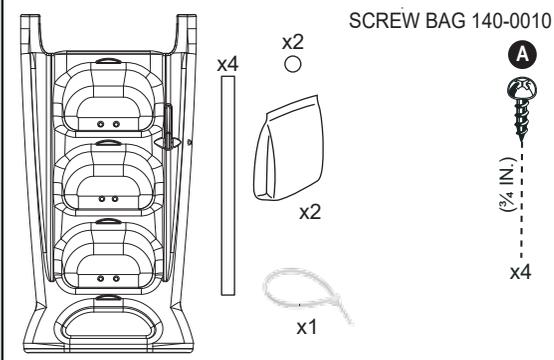

Contents of ladder box SKU # 6003

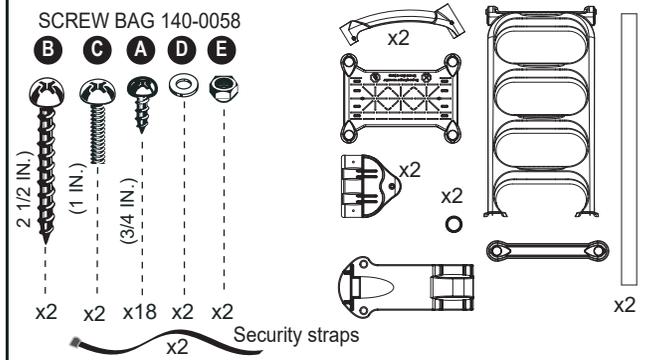

Sand

(not included)






⚠ WARNING

- ▶ Install the step on a flat surface.
- ▶ Do not jump or dive from the step or ladder.
- ▶ Remove the step from water when temperatures drop below freezing.
- ▶ In winter, the step should be stored in an area protected from snow.
- ▶ Never lift the step by its handrails.
- ▶ Use BATTERY operated tools to avoid electric shock near water.
- ▶ Ensure no corrosive materials are added to the step or hardware kit.
- ▶ The step must be installed per manufacturer's instructions.
- ▶ File off all stripped or sharp edges before assembly to avoid injuries and liner damage.
- ▶ The manufacturer is not responsible for damages or injuries caused by improper installation or use of product.
- ▶ To ease the installation of handrails and bolts, use a screwdriver to line up the holes.

Required tools (not included)

A weather-resistant padlock is recommended.

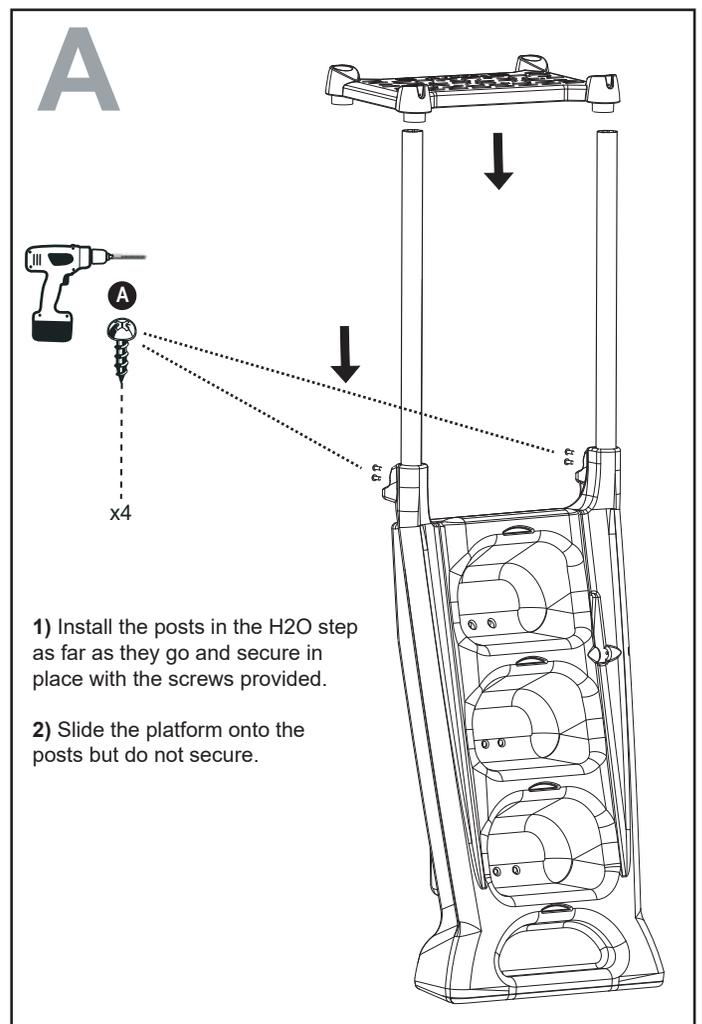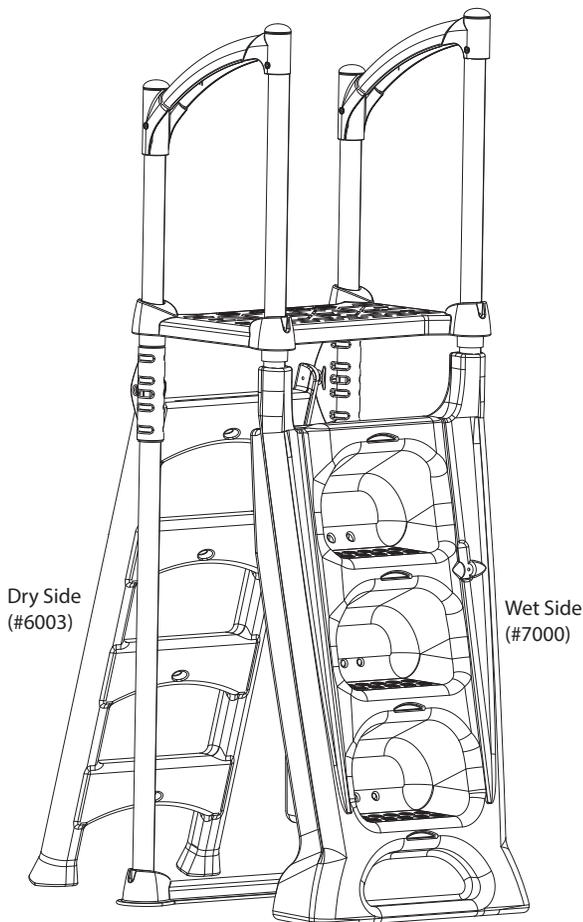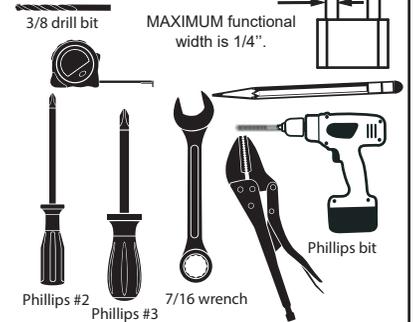

MANUFACTURER WARRANTY

**1 year on step and ladder.
1 year on hardware.**



2257 route 139
Drummondville, Québec
J2A 2G2

WWW.INNOVAPLAS.COM

REV. 10/21/2020


PN:

PG:1

H2O 7000 WITH CLASSIC LADDER 6003


B

1) Insert the two handrails over the two front posts. Do not secure yet (the handrails will more than likely slide down the posts to rest on the platform).

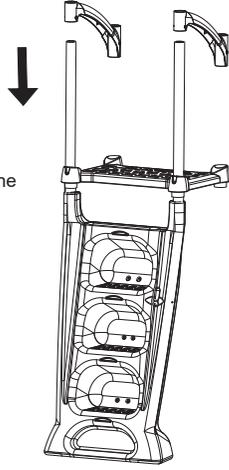

C

1) Fill the two bags provided with 10 lbs of sand each.
2) Insert the sand bags into the bottom of the H2O before submerging the step.

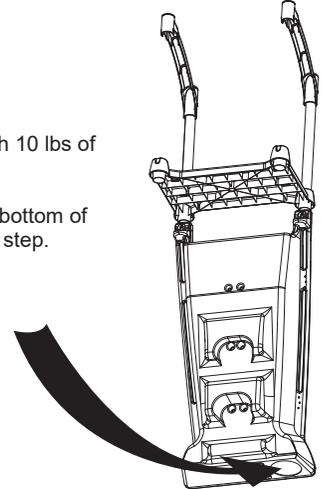


D

1) Slowly submerge the step into the pool. Make sure you do not damage the pool liner in the process.


2) Leave a 1/2"-1" gap between back of the ladder and the pool liner.

Caution Max: 1/2"-1"

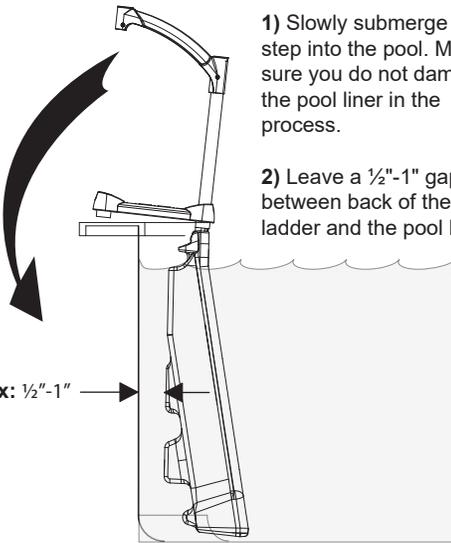


E

1) Once the step is in the pool, secure the platform to the top seat (see illustration) using the two straps provided.

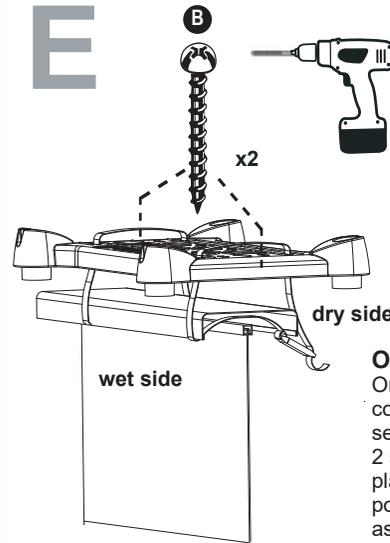

OPTIONAL:
Once the pool step has been completely assembled and secured to the pool, attach the 2 screws supplied through the platform to the top seat of your pool to provided a more rigid assembly.

F

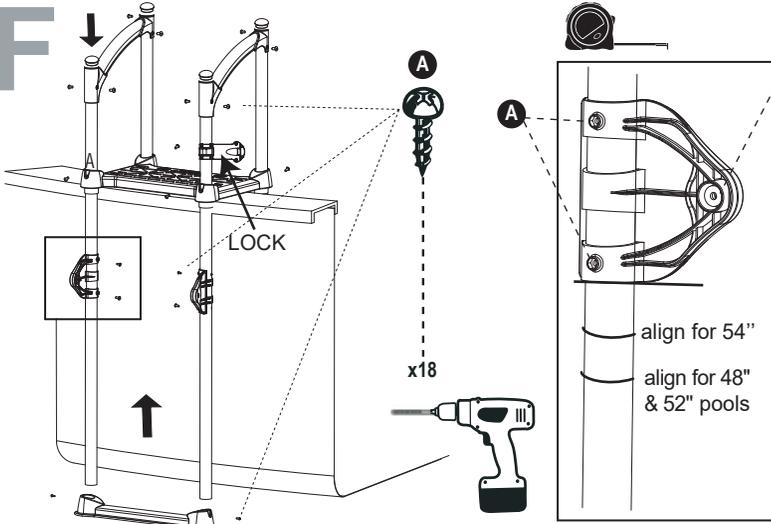

1) Trace a line on each post at 39 inches from the ground for 48" and 52" pools. If you have a 54" pool, trace a line at 40.5 inches from the ground.

2) Slide the pivot blocks onto the posts and line up with the traced marks. Secure with the screws provided.



3) Attach the ladder base to the bottom of the posts with the screws provided.

4) Slide the posts through the platform. Slide the lock over right post between the platform and the handrail. Secure the platform using the screws provided.

5) Slide the posts through the handrails. Insert the post covers into the handrails. If they protrude too much, raise the handrails until the post covers are seated securely on the posts. Secure the short handrails in place with the screws provided.

G

1) Attach the ladder to the pivot blocks with the bolts, washers and nuts provided.

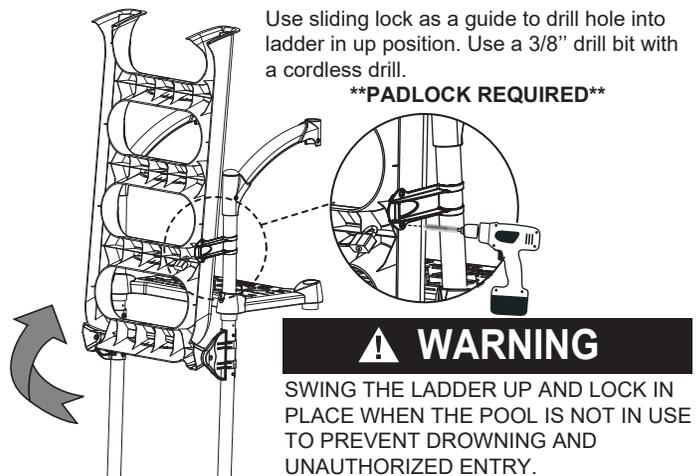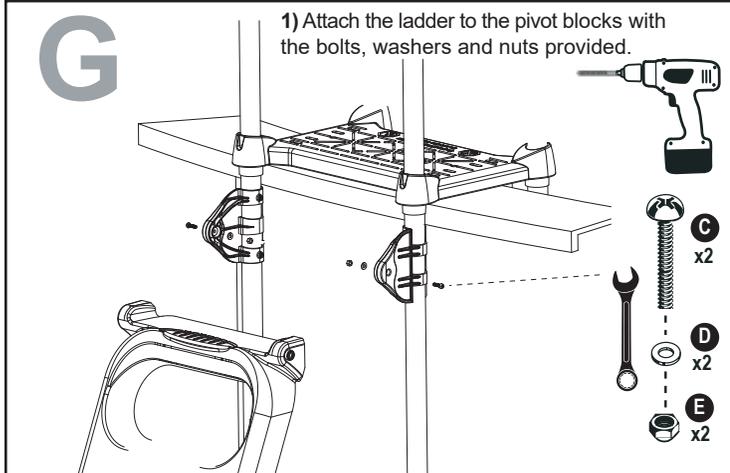

Use sliding lock as a guide to drill hole into ladder in up position. Use a 3/8" drill bit with a cordless drill.

****PADLOCK REQUIRED****

⚠ WARNING

SWING THE LADDER UP AND LOCK IN PLACE WHEN THE POOL IS NOT IN USE TO PREVENT DROWNING AND UNAUTHORIZED ENTRY.

MANUFACTURER WARRANTY

**1 year on step and ladder.
1 year on hardware.**